

ASSESSMENT OF TECHNICAL-ECONOMICAL DEVELOPMENT PERSPECTIVE OF SELECTED NON-FERROUS METAL POTENTIAL IN METALLURGY

PUSTĚJOVSKÁ Pavlína¹, BROŽOVÁ Silvie¹, JURSOVÁ Simona², KARDAS Edyta³

¹ VŠB - TUO, Faculty of Metallurgy and Materials Engineering 17. listopadu 15, 708 00 Ostrava - Poruba, Czech Republic, pavlina.pustejovska@vsb.cz, silvie.brozova@vsb.cz

Abstract

In case of increasing requirements for cleanliness of products in metallurgy is necessary to take into account all sources accompanying elements from the entire course of the process. The main source of charge is mainly iron-bearing charge - mainly pig iron and steel scrap, further ferroalloys used in the production and fluxes. Therefore attention must be paid to the choice and particular sorting charge materials. Economic evaluation is directly related to new Act on Waste.

Keywords: Metallurgy, iron-bearing charge, economic evaluation

1. INTRODUCTION

Application of cost prices in an integrated metallurgical company is a natural way because from the point of view of the whole company and its relation to the environment a global resulting economic effect is a decisive one. This effect reflects even influences of secondary products of technological process, such as blast-furnace gas and slag and/or treatment of other products (secondary raw materials from other processes, for example scales or wastes containing iron). The comparison of production of pig iron and steel in Czech Republic and Poland are mentioned in the following **Table 1**.

Table 1 The comparison of production of pig iron and steel in Czech Republic and Poland [1]

Production [thousand tonnes]	European Union	Czech Republic	Poland
Crude steel production	16 9243	5360	8620
Iron production	95 088	4152	4651

2. METALLIC CHARGE AND QUALITY OF CHARGE BASE MATERIALS

Base materials consist of primary materials: (ores, sinter, ore extract, lime stone) and secondary materials (treated steel slag, scales with oil content up to 1 %, flue dust emission), rough converter sludge (upto 1 mm), blast-furnace sludge, magnetic fracture, dust from agglomeration electro-separators).

Czech metallurgical plants purchase prevailing part of iron ores from Ukraine and Russia. The main supplier states are as follows: Ukraine – it supplies approx. 60 million tons per year and it is the main supplier for the Czech Republic. Russia supplies pellets first of all (Michailovsky, Lebedinsky, with richness of 60-62 % Fe).

² VŠB - TUO, Centre ENET- Energy Units for Utilization of non Traditional Energy Sources 17. listopadu 15, 708 00 Ostrava - Poruba, Czech Republic, simona.jursova@vsb.cz

³ Czestochowa University of Technology, Faculty of Management, al. Armii Krajowej 19b p.309z, 42-201 Czestochowa, Poland, ekonstan@wip.pcz.pl



A similar situation can be observed in Poland. The iron ore in the form of pellets are imported mainly from Russia and Ukraine. The Poltava pellets are the most used, but also to a lesser extent, Mikhailovsky, Lebiedeńsky and Kostomuksha.[2]

Steel scrap belongs to the "local" raw materials, the consumption in the Czech Republic is approx. 1.4 t per year but there are problems with its quality, it is also a commodity with the highest price fluctuation.

In Poland, the main suppliers of steel scrap are local junkyards. Widely extensive network of junkyards and scrap collection allows to use mainly Polish scrap. However, due to variations in the amount of scrap available on the market, as in the Czech Republic, the price of scrap constantly fluctuates. [3]

Considerable part of wastes from metallurgical processes is used in other metallurgical processes as a charge material [4], some waste materials can be used also in other technological processes. More than 95 % of total waste in metallurgy is recycled, only 3.5 % is eliminated and 1.3 % temporarily stored which is connected with a specificity of this industry branch. Constantly tightening up legislative leads to necessary use of treated wastes, for example in the form of briquettes [4], even in Czech metallurgical companies. [5]

Waste management legislative in the frame of EC lays emphasis on restriction of origination of wastes and on exploitation of generated wastes and their elimination only by methods which are not harmful to people health and the environment.[6] Secondary sources should gradually replace primary ones where it is technically possible and economically effective and in this way it will contribute to reduction of material and energy demandingness of production. Higher payments are to motivate companies to limit waste disposals which will be much more expensive during next years.

The environmental aspect is an element of organization activities or products that can interact with the environment.[7] Scheme of product lifecycle illustrates **Fig 1**.

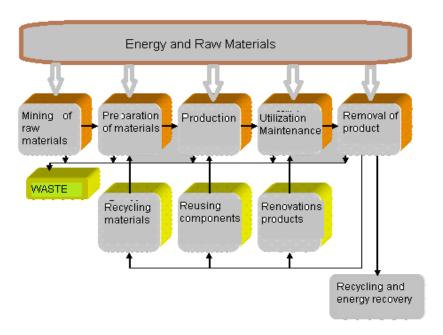


Fig. 1 The scheme of product lifecycle



3. ALTERNATIVE STRATEGIES FOR COST REDUCTION

From the point of view of economy increase of metallurgical companies and cost reduction it would be suitable to apply also some alternative (untraditional) procedures:

- application of untraditional alternative fuels,
- use of pre-deoxidized charge for blast furnaces,
- present addition of two charge components.

The use of some alternative procedures illustrates Fig 2.

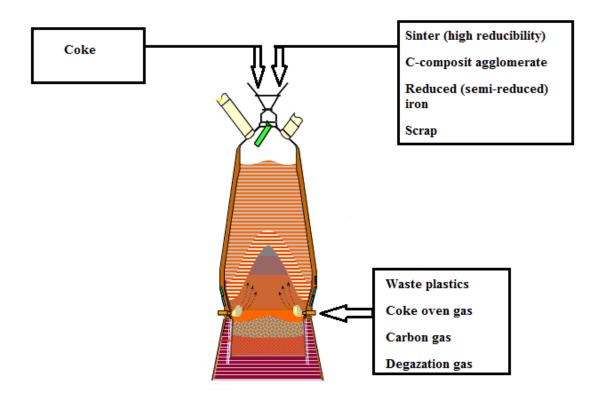


Fig. 2 The use of some alternative procedures

There are several properties characterizing the quality of metallurgical material.[8] One of the most important and specific for production process are metallurgical properties of used feedstock.[9] In VSB – Technical University of Ostrava, Centre ENET the reducibility of metallurgical material supplied from ironworks was tested. This device is also possible to use for sinter and lump ore testing. [10]

The need of connection of technical and economic data for complex evaluation of a blast-furnace process seems to be a very advisable. Besides accompanying elements which are advisable for iron pig production, also elements and metals get into blast furnace together with metallic charge which are not wanted for the process, such as alkali metals and zinc.

Alkali cyanides are generated in blast furnace in the zone of tuyeres by reactions of alkali metals with coke carbon and air nitrogen. Furnace gas puts them into stack where they condensate on colder furnace filling.



Alkali cyanides settled down on the charge descend to the zone of higher temperatures where they react with carbon dioxide. Generated alkali carbonates react further on with nitrogen contained in gas during generation of other cyanides. Through furnace gas they are again transferred to the stack where they again condensate, they fall together with the charge into lower furnace parts with a high temperature. Between stack middle parts and tuyeres' zone the circulation of alkali cyanides is created to which newly generated compounds come up so that concentration of these substances increases. [11]

Alkali presence in the furnace is technologically not wanted because alkali metals and their compounds circulating in the furnace influence unfavourably coke quality. Mechanical strength and wear resistance is reduced by their activity; it means that coke degradation increases when passing through the furnace. [12]

CONCLUSION

Economy of pig iron production is determinative for competition ability of connected steel and rolling mill production. It is connected both with cyclic changes in steel business and changes caused on the market with iron ores and fuels. Repeated variations of inputs as well as outputs influence more and more the economy and competition ability of metallurgical companies.

ACKNOWLEDGEMENTS

This report has been prepared in frame of the research project TA03010161 (Technology Agency of the CR) and the Project No. LO1404 "Energy Units for Utilization of non Traditional Energy Sources".

REFERENCES

- [1] http://www.worldsteel.org/statistics/statistics-archive/monthly-iron-archive.html
- [2] KARDAS E. The analysis of quality of ferrous burden materials and its effect on the parameters of blast furnace process. Metalurgija, Vol 52, No.2, 2013, pp. 149-152.
- [3] INGALDI M, JURSOVÁ S. Economy and possibilities of waste utilization in Poland. In METAL 2013: 22nd International Conference on Metallurgy and Materials. Ostrava: TANGER, 2013, pp. 1779-1784.
- [4] BARICOVA D., PRIBULOVA A., ROSOVA A. Steelmaking slag waste or valuable secondary raw material, 13th International Multidisciplinary Scientific GeoConference. Albena, Bulgaria, 2013,pp.437-442.
- [5] BROŽOVÁ S., INGALDI M, ŠPERLÍN I. Economical aspects of high-temperature heating utilization for industrial waste treatment. . In METAL 2013: 22nd International Conference on Metallurgy and Materials. Ostrava: TANGER, 2013, pp.1735-1739.
- [6] GAJDZIK B., BURCHART-KOROL D. Eco-innovation in manufacturing plants illustrated with an example of Steel products development. *Metalurgija*, 2011, vol. 50 (1). p. 63-66.
- [7] LEGEMZA J. et al. Emissions CO and CO(2) in the sintering process. In SGEM 2010: 10th International Multidisciplinary Scientific GeoConference. Albena, Bulgaria, 2010, pp. 567-572.
- [8] NIESLER M., et al. A study on the proces of fine-grained plumbiferous material agglomeration. Metalurgija, Vol. 52, No 4, 2013, pp. 521-524.
- [9] BERNASOWSKI M. Theoretical Study of the Hydrogen Influence on Iron Oxides Reduction at the Blast Furnace Process. Steel Research International, Vol. 85, No.4, pp.670-678.
- [10] PUSTĚJOVSKÁ P., JURSOVÁ, S., BROŽOVÁ S. Determination of Kinetic Constants from Tests of Reducibility and their Application for Modelling in Metallurgy. Journal of the Chemical Society of Pakistan, Vol. 35, No 3, 2013, pp. 565-569.
- [11] BABICH A., et al. Ironmaking. RWTH Aachen University, Aachen, 2008.
- [12] PUSTĚJOVSKÁ P., BROŽOVÁ S., JURSOVÁ S. Environmental benefits of coke consumption decrease. In METAL 2010: 19nd International Conference on Metallurgy and Materials. Ostrava: TANGER, 2010, pp.79-83.